

02/11/00

A

UTILITY PATENT APPLICATION TRANSMITTAL

Submit an original and a duplicate for fee processing
(Only for new nonprovisional applications under 37 CFR §1.53(b))

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

Attorney Docket No. 203924
First Named Inventor KODAMA, Tetsuo
Express Mail No. EL304645628US

JC625 U.S. PTO
09/502834

02/11/00

APPLICATION ELEMENTS

1. ☒ Utility Transmittal Form
2. ☒ Specification (including claims and abstract) [Total Pages 17]
3. ☒ Drawings [Total Sheets 2]
4. ☒ Combined Declaration and Power of Attorney [Total Pages 3]
 - a. ☒ Newly executed
 - b. ☐ Copy from prior application
[Note Box 5 below]
 - i. ☐ Deletion of Inventor(s) Signed statement attached deleting inventor(s) named in the prior application
5. ☐ Incorporation by Reference: The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program
7. ☐ Nucleotide and/or Amino Acid Sequence Submission
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy
 - c. ☐ Statement verifying above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet and document(s))
9. ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)
 - ☐ Form PTO-1449
 - ☐ Copies of References
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (Should be specifically itemized)
14. ☐ Small Entity Statement(s)
 - ☐ Enclosed
 - ☐ Statement filed in prior application; status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
16. ☐ Other:

17. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information in (a) and (b) below:
- (a) ☐ Continuation ☐ Divisional ☐ Continuation-in-part of prior application Serial No. _____
Prior application information: Examiner _____; Group Art Unit: _____
- (b) Preliminary Amendment: Relate Back - 35 USC §120. The Commissioner is requested to amend the specification by inserting the following sentence before the first line:
"This is a ☐ continuation ☐ divisional of copending application(s)
☐ Serial No. _____, filed on _____
☐ International Application, filed on _____, and which designates the U.S."

APPLICATION FEES

APPLICATION FEES				
BASIC FEE				\$690.00
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total Claims	8 -20=	0	x \$18.00	\$0.00
Independent Claims	2 - 3=	0	x \$78.00	\$0.00
<input type="checkbox"/> Multiple Dependent Claims(s) if applicable			+\$260.00	\$0.00
Total of above calculations =				\$690.00
Reduction by 50% for filing by small entity =				\$(0.00)
<input type="checkbox"/> Assignment fee if applicable			+ \$40.00	\$0.00
TOTAL =				\$690.00


UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No. 203924

19. ☐ Please charge my Deposit Account No. 12-1216 in the amount of \$.
20. ☒ A check in the amount of \$690.00 is enclosed.
21. The Commissioner is hereby authorized to credit overpayments or charge any additional fees of the following types to Deposit Account No. 12-1216:
- a. ☒ Fees required under 37 CFR §1.16.
- b. ☒ Fees required under 37 CFR §1.17.
22. ☒ The Commissioner is hereby generally authorized under 37 CFR §1.136(a)(3) to treat any future reply in this or any related application filed pursuant to 37 CFR §1.53 requiring an extension of time as incorporating a request therefor, and the Commissioner is hereby specifically authorized to charge Deposit Account No. 12-1216 for any fee that may be due in connection with such a request for an extension of time.

23. CORRESPONDENCE ADDRESS

John Kilyk, Jr., Registration No. 30,763
Leydig, Voit & Mayer, Ltd.
Two Prudential Plaza, Suite 4900
180 North Stetson
Chicago, Illinois 60601-6780
Telephone: (312) 616-5600
Facsimile: (312) 616-5700

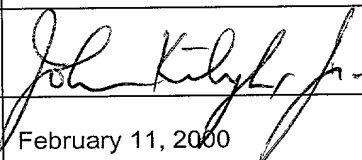Name	John Kilyk, Jr., Reg. No. 30,763
Signature	
Date	February 11, 2000

Certificate of Mailing Under 37 CFR §1.10

I hereby certify that this Utility Patent Application Transmittal and all accompanying documents are being deposited with the United States Postal Service "Express Mail Post Office To Addressee" Service under 37 CFR §1.10 on the date indicated below and is addressed to: Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

		February 11, 2000
Name of Person Signing	Signature	Date

Attorney Docket No.
203924

PATENT APPLICATION

Invention Title:

POLYBENZAZOLE ARTICLE AND PRODUCTION METHOD THEREOF

Inventors:

Tetsuo Kodama	Japan	Ohtsu	Japan
INVENTOR'S NAME	CITIZENSHIP	CITY OF RESIDENCE	STATE or FOREIGN COUNTRY

Yusuke Shimizu	Japan	Ohtsu	Japan
INVENTOR'S NAME	CITIZENSHIP	CITY OF RESIDENCE	STATE or FOREIGN COUNTRY

INVENTOR'S NAME	CITIZENSHIP	CITY OF RESIDENCE	STATE or FOREIGN COUNTRY
-----------------	-------------	-------------------	--------------------------

INVENTOR'S NAME	CITIZENSHIP	CITY OF RESIDENCE	STATE or FOREIGN COUNTRY
-----------------	-------------	-------------------	--------------------------

INVENTOR'S NAME	CITIZENSHIP	CITY OF RESIDENCE	STATE or FOREIGN COUNTRY
-----------------	-------------	-------------------	--------------------------

INVENTOR'S NAME	CITIZENSHIP	CITY OF RESIDENCE	STATE or FOREIGN COUNTRY
-----------------	-------------	-------------------	--------------------------

Be it known that the inventors listed above have invented a certain new and useful invention with the title shown above of which the following is a specification.

SPECIFICATION

POLYBENZAZOLE ARTICLE AND PRODUCTION METHOD THEREOF

TECHNICAL FIELD OF THE INVENTION

5 The present invention relates to a polybenzazole article having markedly superior light resistance, which is preferable as industrial materials, and to a production method thereof.

BACKGROUND OF THE INVENTION

10 Polybenzazole fiber has at least twice the strength and elastic modulus of p-aramide fiber and is a typical commercially available super fiber at the moment. In addition, it has a limiting oxygen index of 68 and high heat resistance to stand decomposition temperatures of up to 650°C. Thus, the fiber is expected to be a next generation super fiber.

15 Production of articles from a polyphosphoric acid solution of polybenzazole polymer has been known. For example, production conditions are disclosed in US Patent No. 5,296,185 and US Patent No. 5,385,702, water washing and drying method is disclosed in WO 94/04726, and heat treatment is disclosed in US Patent No. 5,296,185.

20 While polybenzazole articles have extremely advantageous properties as industrial materials, as mentioned earlier, once physically damaged, their light resistance becomes lower. In particular, when they are exposed to a light in the visible region, they show lower strength. As used herein, the physical damage includes bending and kink band caused by shear force. The kink band is observed
25 as a black band under a microscope of 200 magnification. An article free of physical damage does not show any significant decrease in strength upon exposure to sunlight, but is susceptible to damage during, for example, weaving a fiber, knitting a fiber or processing a fiber to give various products. Therefore, the present inventors have
30 intensively studied to give a polybenzazole article, which is light, highly strong, and which has high elastic modulus, high heat resistance, and high light resistance.

SUMMARY OF THE INVENTION

35 Accordingly, the present invention provides a polybenzazole article superior in light resistance, which comprises a polybenzazole and a light-resisting agent that allows for a regular reflectance of the article of not more than 30% in not less than 30% of the wavelength

region of from 450 nm to 700 nm. Preferably, the present invention provides the above-mentioned polybenzazole article, wherein the light-resisting agent allows for a regular reflectance of the article of not more than 20% in not less than 10% of the wavelength region of from 450 nm to 700 nm, the above-mentioned polybenzazole article having a strength of not less than 35 g/d, the above-mentioned polybenzazole article wherein the light-resisting agent is an oxidation dyestuff, the above-mentioned polybenzazole article wherein the light-resisting agent is an aromatic amine compound or phenol, and the above-mentioned polybenzazole article wherein the light-resisting agent is added in a proportion of 0.01% to 20.0% by weight of the article.

The production method of the present invention comprises extruding a polybenzazole solution, extracting a solvent, and adding a light-resisting agent to an article before drying, whereby to give a polybenzazole article superior in light resistance. Further, it is the above-mentioned production method of a polybenzazole article having superior light resistance, wherein the light-resisting agent is added to the article in not longer than 10 minutes.

BRIEF DESCRIPTION OF THE DRAWINGS









Figs. 1-(1) and 1-(2) show regular reflectance spectra of a PBO fiber at 300 nm - 700 nm, wherein Fig. 1-(1) shows the results of a PBO fiber free of light-resisting agent and Fig. 1-(2) shows the results after treatment with a light-resisting agent.

DETAILED DESCRIPTION OF THE INVENTION

The present invention is described in detail in the following. Polybenzazole fiber of the present invention refers to fibers made from a polybenzazole (PBZ) polymer. The PBZ polymer to be used to give the polybenzazole article of the present invention includes polyparaphenylene benzobisoxazole (PBO) homopolymer, polybenzothiazole (PBT) homopolymer, and random, sequential or block copolymer of PBO or PBT, which preferably contains PBO component in substantially not less than 85% by mole. The polybenzazole (PBZ) polymers are disclosed in, for example, Wolf et al., "Liquid Crystalline Polymer Compositions, Process and Products" (USP 4,703,103, October 27, 1987), "Liquid Crystalline Polymer Compositions, Process and Products" (USP 4,533,692, August 6, 1985), "Liquid Crystalline Poly(2,6-Benzothiazole) Compositions, Process

and Products" (USP 4,533,724, August 6, 1985), "Liquid Crystalline Polymer Compositions, Process and Products" (USP 4,533,693, August 6, 1985), Evers et al, "Thermooxidatively Stable Articulated p-Benzobisoxazole and p-Benzobisoxazole Polymers" (USP 4,539,567 November 16, 1982), Tsai et al, "Method for Making Heterocyclic Block Copolymer" (USP 4,578,432, March 25, 1986), and the like.

The structural unit contained in the PBZ polymer is preferably selected from rheotropic liquid crystalline polymers. This monomer unit is shown in the following structural formulas (a) - (h), more preferably monomer units selected from the structural formulas (a) - (c).



substantially made from PBO is exemplified by cresol and non-oxidative acid capable of dissolving the polymer. Examples of suitable acid solvent include polyphosphoric acid, methanesulfonic acid, high conc. sulfuric acid and mixtures thereof. More preferred is polyphosphoric acid.

The polymer concentration in the solvent is preferably at least 7% by weight, more preferably at least 10% by weight, most preferably at least 14% by weight. The maximum concentration thereof is limited by actual handling property, such as solubility of polymer and viscosity of dope. Due to such limiting factors, the polymer concentration of the dope does not exceed 20% by weight.

The preferable homopolymer, copolymer and the dope are synthesized by known methods. For example, the methods are disclosed in USP 4,533,693 (August 6, 1985) to Wolfe et al, USP 4,772,678 (September 20, 1988) to Sybert et al, and USP 4,847,350 (July 11, 1989) to Harris. According to USP 5,089,591 (February 18, 1992) to Gregory et al, the polymer substantially consisting of PBO can be made to have a high molecular weight by high-speed reaction in a dehydrating acid solvent at a relatively high temperature under high shear conditions.

A dope containing a polymer polymerized in this way is fed to the extruder and discharged from the spinneret generally at a temperature not less than 100°C. A polymer yarn requires a long draw zone to achieve a sufficient draw ratio (SDR), as disclosed in USP 5,296,185. It is preferably cooled uniformly with a rectified cooling air having a relatively high temperature (not less than solidification temperature of dope and not more than spinning temperature). The length (L) of the draw zone is such that the solidification completes in a non-coagulating air, which is roughly determined by a single hole discharge amount (Q). For fine fiber properties to be achieved, a stress of not less than 2 g/d should be applied to the dope when extruded into the draw zone, upon polymer conversion (supposing the stress applies solely on polymer).

The polymer stretched in the draw zone is then led to an extraction (coagulation) bath. Due to high tension, turbulence in the liquid in the extraction bath need not be considered and any type of extraction bath can be used. For example, a funnel type, water tank type, aspirator type or waterfall type bath can be used. The extracting solution is suitably an aqueous phosphoric acid solution

or water. When phosphoric acid is used, plural extraction baths are used and not less than 99%, preferably not less than 99.5%, of phosphoric acid is extracted from the polymer in the final extraction bath. The liquid to be used as an extracting medium in the present invention is subject to no particular limitation. Preferred are water, methanol, ethanol, acetone and the like, which substantially do not have compatibility with polybenzazole. It is also possible to perform the extraction (coagulation) in multi-stages to make the concentration of the aqueous phosphoric acid solution become stepwisely thinner, followed by ultimate washing with water. It is further preferable to neutralize the fiber bundle with an aqueous sodium hydroxide solution and the like before washing with water.

The present invention is characterized in that a step for adding a light-resisting agent is included in an article production line to give an article containing the light-resisting agent. A light-resisting agent is added to a dope after completion of polymerization and immediately before extrusion, or is contained by immersion of or coating on an article after entry thereof into a coagulation bath after extrusion of the dope from spinneret, and before a drying step. The agent is contained in an article by a conventional method, which is exemplified by, but not limited to, the following methods. For example, a light-resisting agent is added to a dope and the mixture is kneaded in a twin screw kneader to give a homogeneous mixture of polybenzazole and the light-resisting agent, followed by extrusion spinning, or a light-resisting agent is previously dissolved in a coagulation agent, into which a dope having a usual composition is led to allow coagulation, or an article is immersed in or coated with an aqueous solution containing a light-resisting agent or a solution of the agent in an organic solvent by immersion method, kiss roll method or guide method, or is sprayed onto an article on a roller, during, before or after a water washing step or neutralization step.

There are a multitude of fine holes called capillary inside a polybenzazole article and water is contained in these capillaries before drying. The holes are interconnected and connect the outside with the inside. Using these communicating capillaries, therefore, material transfer is made possible. A light-resisting agent on the surface of the article can be led to the inside by adding the agent after solvent extraction (coagulation) and before drying. In fact,

the immersion time necessary for adding a light-resisting agent after entry into coagulation bath and before drying step is not less than 0.1 second, preferably not less than 0.5 second, most preferably not less than 1 second. It is possible to add a sufficient amount of a light-resisting agent by immersion for the above-mentioned period. However, too long a time period for immersion results in a higher production cost, which is not preferable.

When the article is a fiber, moreover, the obtained fiber is woven or knitted, and a light-resisting agent may be coated during the dyeing and post-processing steps. In view of productivity, a treatment time of 10 minutes or less is preferable.

The light-resisting agent is exemplified by, but not limited to, an oxidation dyestuff compound that is oxidized by the action of an oxidizing agent inclusive of air and develops color, aromatic amines and phenols. The oxidation dyestuff compound contains not a dye synthesized by oxidation but an intermediate that produces dye upon oxidation. To be exact, it is a base that generates an oxidation dyestuff, which is also called an oxidation base. Examples of the aromatic amine and phenol include aniline, *o*-phenylenediamine, *m*-phenylenediamine, *p*-phenylenediamine, *o*-aminophenol, *m*-aminophenol, *p*-aminophenol, naphthol, derivatives thereof, acid salts thereof and the like. In general, these compounds are solid or liquid, and used upon dissolution in a solvent unless it can be directly added to a dope to give a homogeneous mixture. The solvent may be any, such as water, aqueous solution such as aqueous phosphoric acid solution, alcohols such as ethanol, methanol, ethylene glycol and the like, ketones such as acetone, and the like, as long as it is compatible with a light-resisting agent and can permeate into a fiber. The solution is treated with sodium hypochlorite, hydrogen peroxide, iron(III) chloride, sodium nitrite, air and the like to promote oxidation and condensation of the light-resisting agent. The light-resisting agent develops color, reacts with or adsorbs onto a polybenzazole article, and hardly washed off in the following washing step. When water is used as the solvent in consideration of environment, safety, and waste treatment, a phenylenediamine compound is most preferable, which has high solubility, is easily oxidized and which develops color only with air. It is possible to use concurrently two or more kinds of light-resisting agents. When different kinds of

oxidation dyestuff compounds are used alongside, the oxidation and color development rate may significantly vary to produce different effects.

For diffusion permeation into a polybenzazole article, the concentration of light-resisting agent in a solution is preferably as high as possible. However, an unnecessarily high concentration lowers the strength of the article, in proportion to the weight ratio of the light-resisting agent, and increases the amount of waste from the washing step. While the time of immersion in a solution containing a light-resisting agent is desirably as long as possible, the cost of equipment poses a problem. While the concentration of a solution containing a light-resisting agent, and immersion time in this solution need to be optimized according to the shape of the polybenzazole article, the article can be immersed in a solution containing a light-resisting agent in a concentration of 0.01% by weight - 20% by weight for 10 minutes or less, preferably 5 minutes or less, more preferably 1 minute or less, most preferably 30 seconds or less.

After washing with water, drying (heat treatment) at not less than 100°C, generally lower than 300°C, eliminates the connection between capillaries, and the light-resisting agent can be easily fixed in the fiber. The strength DT after heat treatment is not less than 35 g/d. It is also important to minimize an adverse effect of the heat treatment on the polymer.

For the article of the present invention to show effective light resistance, the article first needs to contain a light-resisting agent, that allows the article to have a regular reflectance of not more than 30%, in not less than 30%, preferably not less than 80%, more preferably not less than 95%, of the region of the wavelength of from 450 nm to 700 nm. Further, the article needs to contain a light-resisting agent that allows the article to have a regular reflectance of not more than 20%, in not less than 10%, preferably not less than 30%, of the region of the wavelength of from 450 nm to 700 nm. Specific examples of the light-resisting agent include those that develop the colors of black, purple and brown, which are characteristic of an oxidation dyestuff. Fig. 1 shows regular reflectance spectra of an untreated PBO fiber and regular reflectance spectrum of PBO fiber treated with an oxidation dyestuff (p-phenylenediamine, 5% by weight of fiber).

Secondly, a light-resisting agent that prevents, to the highest possible extent, a decrease in the strength due to a heat treatment should be used. After adding a light-resisting agent to a polybenzazole fiber, for example, a dry treatment at a high temperature of from about 100°C to 350°C is applied. When addition of a light-resisting agent causes a drastic decrease in the strength during heat treatment, the superior properties peculiar to polybenzazole article cannot be maintained. From this aspect, a light-resisting agent needs to be carefully selected and the above-mentioned light-resisting agents are recommended.

Thirdly, an article preferably contains an appropriate amount of a light-resisting agent. The content is preferably not less than 0.01% by weight and not more than 20.0% by weight, most preferably not less than 0.5% by weight and not more than 10.0% by weight. The content of light-resisting agent can be confirmed based on differences in the weights per given length, areas or volumes of untreated article and an article treated with light-resisting agent.

The chemical state and action of the light-resisting agent compound in the article are not known for sure. Shading by color development, long coupling system, electron donating property or radical trapping property of a dyestuff having a small oxidation reduction potential, or reaction with polymer, and stabilization by configuration are inferred, but the present invention is not limited by this consideration.

The measurement methods used in the present invention are described in the following.

<Measurement method of visible reflection spectrum>

As an ultraviolet visible light spectrophotometer, Hitachi U-3500 automatic recording spectrophotometer was used. An angled (10°) spacer was placed at a location for a reflection sample in a $\phi 60$ mm integrating sphere apparatus equipped with an ultrahigh sensitivity photomultiplier R928, a sample (pressworked article) having a thickness of not less than 3 mm was set in such a manner that a light was not leaked, and a regular reflection spectrum was measured. A white reflector tablet made of aluminum oxide was set at the above-mentioned location for the sample, and the regular reflectance spectrum of the sample was obtained using the obtained reflection spectrum as 100% regular reflectance. A thin fiber sample was cut at

a length of not more than 5 mm, and pressed to have a uniform thickness of not less than 3 mm with the pressure of not less than 8 t/cm² for not less than 2 min and used as a sample. Measurement conditions were as follows.

5 Measurement wavelength: 300 nm - 700 nm
 Scanning speed: 600 nm/min
 Slit (visible): 5.00 nm
 Photomultiplier voltage: automatic control
 PbS sensitivity: 2

10 <Evaluation method of light resistance>

The light resistance was evaluated by measuring the strength of an article before and after exposure to light.

15 A water-cooled xenon arc weather meter (manufactured by Atlas, model Ci 35A) was used for light exposure test. An article was wound around a metal frame and set to the apparatus. Using a quartz inside filter glass and a type S porosilicate outside filter glass, continuous operation was performed for 100 hr under the conditions of irradiation illumination 0.35 W/m² (at 340 nm), black panel temperature (83±3)°C, and test tank inside humidity (50±5)%. When the article was wound
20 around the metal frame, the article was stretched toward the reverse direction using a stainless scale having a thickness of 0.80 mm and folded three times on the light exposure plane, thereby to cause kink band (damage) on the article.

<Measurement method of strength>

25 An article, particularly a fiber, was measured for strength by a tensile tester (manufactured by A & D, model RTM 250) according to JIS-L 1013. When the sample was set, a load of 30 g/denier was applied and tensile test was performed after taking up the slack of the sample.

30 The present invention is explained in more detail in the following by way of Examples, to which the present invention is not limited.

Example 1

35 A spinning dope containing polyparaphenylene benzobisoxazole (14.0% by weight) obtained by the method described in USP 4,533,693 and having an intrinsic viscosity as measured with a methanesulfonic acid solution at 30°C, of 24.4 dL/g, and polyphosphoric acid containing phosphorus pentaoxide in 83.17% by weight was spun. The dope was passed through a metal net filter, and kneaded and defoamed in a twin

screw kneader. The pressure was elevated, the dope temperature was maintained at 170°C, and the dope was spun at 170°C from a spinneret having 160 holes. The delivered yarns were cooled with cooling air at 60°C and wound around a godet roller to afford a spinning speed. The yarns were led into an extraction (coagulation) bath of a 20% by weight aqueous phosphoric acid solution maintained at a temperature of 20±2°C. The yarns were successively washed with ion exchange water in a second extraction bath, immersed in a 0.1 mol/L sodium hydroxide solution for neutralization, immersed in a black aqueous solution containing p-phenylenediamine (5% by weight) at 40°C for 60 seconds. After washing with water for 10 seconds, the yarns were dried at 120°C for 120 seconds. The obtained fiber was folded 3 times and subjected to light resistance test. The results are shown in Table 1.

Example 2

The fiber was prepared according to the method described in Example 1 except that the yarns were dried at 300°C for 120 seconds after the final water washing. The obtained fiber was folded 3 times and evaluated for resistance to light. The results are shown in Table 1.

Example 3

The fiber was prepared according to the method described in Example 1 except that the yarns were immersed in a black solution of p-phenylenediamine (10% by weight) at 50°C for 15 seconds and the yarns were washed with water for 10 seconds and dried at 300°C for 120 seconds after neutralization step. The obtained fiber was folded 3 times and evaluated for resistance to light. The results are shown in Table 1.

Example 4

The fiber was prepared according to the method described in Example 1 except that the yarns were immersed in a black mixture of p-phenylenediamine (0.2% by weight) and m-phenylenediamine (0.2% by weight) at 50°C for 1 min after neutralization step, and the yarns were washed with water for 10 seconds and dried at 300°C for 120 seconds. The obtained fiber was folded 3 times and evaluated for resistance to light. The results are shown in Table 1.

Example 5

A black substance obtained by concentrating a black mixture of p-phenylenediamine (5% by weight) and m-phenylenediamine (5% by weight) was cast into the dope in the kneader as in Example 1 in a

proportion of 5% of the dope weight. The mixture was thoroughly mixed and a fiber was prepared in the same manner as in Example 1. The obtained fiber was folded 3 times and evaluated for resistance to light. The results are shown in Table 1.

5 **Example 6**

A black solution was obtained by adding a small amount (less than about 1000 ppm) of a sodium hypochlorite solution to an aqueous solution of *o*-aminophenol (5% by weight) at 50°C, and the yarns prepared according to the method described in Example 1 were immersed therein
10 for 60 seconds after neutralization step. The yarns were washed with water for 10 seconds and dried at 300°C for 120 seconds. The obtained fiber was folded 3 times and evaluated for resistance to light. The results are shown in Table 1.

Example 7

15 A black solution was obtained by adding a small amount (less than about 1000 ppm) of a sodium hypochlorite solution to an aqueous solution of 2-amino-4-nitrophenol (5% by weight) at 50°C, and the yarns prepared according to the method described in Example 1 were immersed therein for 60 seconds after neutralization step. The yarns were
20 washed with water for 10 seconds and dried at 300°C for 120 seconds. The obtained fiber was folded 3 times and evaluated for resistance to light. The results are shown in Table 1.

Example 8

A black solution was obtained by adding a small amount (less
25 than about 1000 ppm) of a sodium hypochlorite solution to an aqueous solution of 2-amino-4-sulfonamide (5% by weight) at 50°C, and the yarns prepared according to the method described in Example 1 were immersed therein for 60 seconds after neutralization step. The yarns were
30 washed with water for 10 seconds and dried at 300°C for 120 seconds. The obtained fiber was folded 3 times and evaluated for resistance to light. The results are shown in Table 1.

Example 9

A black solution was obtained by adding a small amount (less
35 than about 1000 ppm) of a sodium hypochlorite solution to a solution of 1,8-diaminonaphthalene (5% by weight) in ethanol at 30°C, and the yarns prepared according to the method described in Example 1 were immersed therein for 60 seconds after neutralization step. The yarns were washed with water for 10 seconds and dried at 200°C for 120 seconds.

The obtained fiber was folded 3 times and evaluated for resistance to light. The results are shown in Table 1.

Example 10

The yarns prepared according to the method described in Example 1 were immersed in an aqueous solution of potassium iodide (5% by weight) and copper(II) bromide (2% by weight) at room temperature for 60 seconds after neutralization step. The yarns were washed with water for 10 seconds and dried at 300°C for 120 seconds. The obtained fiber was folded 3 times and evaluated for resistance to light. The results are shown in Table 1.

Example 11

The yarns prepared according to the method described in Example 1 were immersed in a solution having a weight ratio of iodine:potassium iodide:water=1 : 12.5 : 8.3 at room temperature for 60 seconds after neutralization step. The yarns were washed with water for 10 seconds and dried at 300°C for 120 seconds. The obtained fiber was folded 3 times and evaluated for resistance to light. The results are shown in Table 1.

Example 12

The yarns prepared according to the method described in Example 1 were immersed in a solution of a dyestuff acid black 48 (5% by weight) in ethyl alcohol at 50°C for 60 seconds after neutralization step. The yarns were washed with water for 10 seconds and dried at 300°C for 120 seconds. The obtained fiber was folded 3 times and evaluated for resistance to light. The results are shown in Table 1.

Comparative Example 1

A spinning dope was spun, which contained polyparaphenylene benzobisoxazole (14.0% by weight) obtained by the method described in USP 4,533,693 and having an intrinsic viscosity as measured with a methanesulfonic acid solution at 30°C, of 24.4 dL/g, and polyphosphoric acid containing phosphorus pentaoxide in 83.17% by weight. The dope was passed through a metal net filter, and kneaded and defoamed in a twin screw kneader. The pressure was elevated, and the dope temperature was maintained at 170°C, and the dope was spun at 170°C from a spinneret having 160 holes. The delivered yarns were cooled with cooling air at 60°C and wound around a godet roller to give a spinning speed. The yarns were led into an extraction (coagulation) bath of a 20% by weight aqueous phosphoric acid solution maintained

at a temperature of $20 \pm 2^\circ\text{C}$. The yarns were successively washed with ion exchange water in a second extraction bath, immersed in 0.1 mol/L sodium hydroxide solution for neutralization. The yarns were dried at 120°C for 120 seconds. The obtained fiber was folded 3 times and evaluated for resistance to light. The results are shown in Table 1.

Comparative Example 2

The yarns after final water washing step, which were prepared according to the method described in Comparative Example 1, were dried at 300°C for 120 seconds. The obtained fiber was folded 3 times and evaluated for resistance to light. The results are shown in Table 1.

Comparative Example 3

The yarns prepared according to the method described in Example 1 were immersed in a solution of 2-mercaptobenzimidazole (reducing agent, 10% by weight) in DMF at 40°C for 60 seconds after neutralization step. The yarns were washed with water for 10 seconds and dried at 120°C for 120 seconds. The obtained fiber was folded 3 times and evaluated for resistance to light. The results are shown in Table 1.

Table 1

	light-resisting agent (% by weight)	* 1(%)	* 2(%)	Initial strength (g/d)	Strength after exposure to light* (g/d)	Overall evaluation
Ex. 1	4.0	100	42	38.2	20.2	○
Ex. 2	3.6	100	39	37.6	18.2	○
Ex. 3	3.9	100	40	37.9	20.5	○
Ex. 4	0.8	85	0	37.0	10.4	○
Ex. 5	1.4	100	72	35.6	14.1	○
Ex. 6	3.2	100	48	37.0	16.1	○
Ex. 7	3.5	100	35	36.7	17.0	○
Ex. 8	3.6	100	31	36.8	16.5	○
Ex. 9	3.8	100	46	35.8	17.4	○
Ex. 10	1.9	100	23	32.0	12.7	△
Ex. 11	5.3	100	75	29.4	14.1	△
Ex. 12	2.1	100	63	34.0	7.5	△
Com. Ex. 1	0	18	0	38.5	4.2	×
Com. Ex. 2	0	20	0	37.1	4.0	×
Com. Ex. 3	9.5	0	0	33.2	7.3	×

(Note) *1: percentage of wavelength region where regular reflectance is not more than 30% in wavelength 450 nm - 700 nm

5 *2: percentage of wavelength region where regular reflectance is not more than 20% in wavelength 450 nm - 700 nm

 *: exposure to xenon light for 100 hr

10 From the above Table 1, it is appreciated that the article of the present invention shows significantly improved light resistance as compared to conventional articles, and that the inventive article has superior physical properties. In addition, it has a characteristic color.

15 According to the present invention, a polybenzazole article having superior light resistance can be produced industrially and easily. The present invention affords a greater effect in expanding the field of applicability by enhancing the practicality as an industrial material. In particular, the article is suitable for

industrial use in the outdoors where it is exposed to a visible light.
It is also suitable for use as an outerwear such as fireman's garments.

This application is based on application No. 36314/1999 filed
in Japan, the contents of which are incorporated hereinto by reference.

15


WHAT IS CLAIMED IS

1. A polybenzazole article superior in light resistance, which comprises a polybenzazole and a light-resisting agent that allows for a regular reflectance of the article of not more than 30% in not less
5 than 30% of the wavelength region of from 450 nm to 700 nm.
2. The polybenzazole article of claim 1, wherein the light-resisting agent allows for a regular reflectance of the article of not more than 20% in not less than 10% of the wavelength region of from 450 nm to
10 700 nm.
3. The polybenzazole article of claim 1, which has a strength of not less than 35 g/d.
- 15 4. The polybenzazole article of claim 1, wherein the light-resisting agent comprises an oxidation dyestuff compound.
5. The polybenzazole article of claim 1, wherein the light-resisting agent comprises an aromatic amine or a phenol.
- 20 6. The polybenzazole article of claim 1, wherein the light-resisting agent is contained in a proportion of 0.01 to 20% by weight of the article.
- 25 7. A method for producing a polybenzazole article superior in light resistance, which comprises extruding a polybenzazole solution and adding a light-resisting agent to the article after extracting a solvent and before drying.
- 30 8. The method of claim 7, wherein the light-resisting agent is added to the article within a time period of 10 minutes.

ABSTRACT OF THE DISCLOSURE


The present invention provides a polybenzazole article superior in light resistance, which contains a light-resisting agent that allows for a regular reflectance of the article of not more than 30% in not less than 30% of the wavelength region of from 450 nm to 700 nm and a production method thereof. The present invention provides a polybenzazole article having noticeably superior light resistance, which is preferable as industrial materials and fireman's garments, and a production method thereof.

FIG. 1(1)

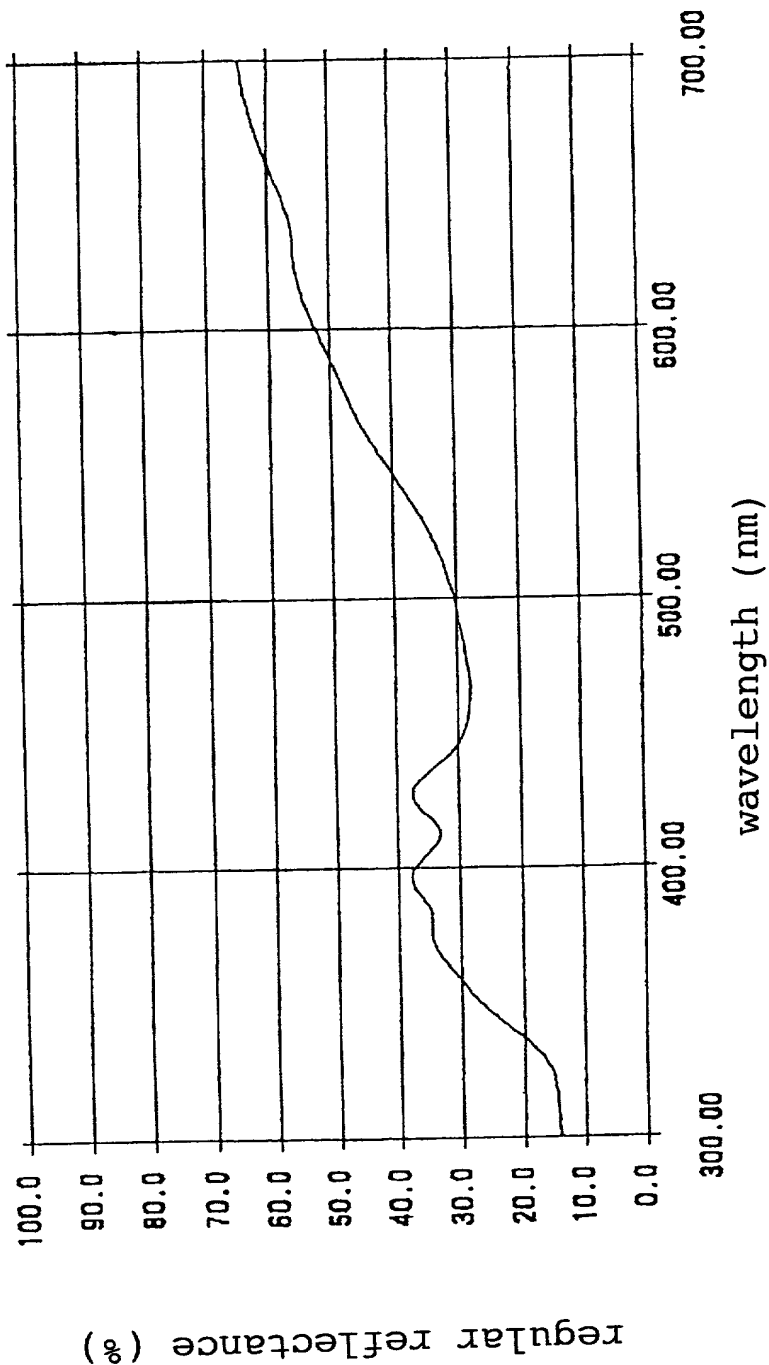

regular reflectance spectrum of PBO fiber

FIG. 1(2)

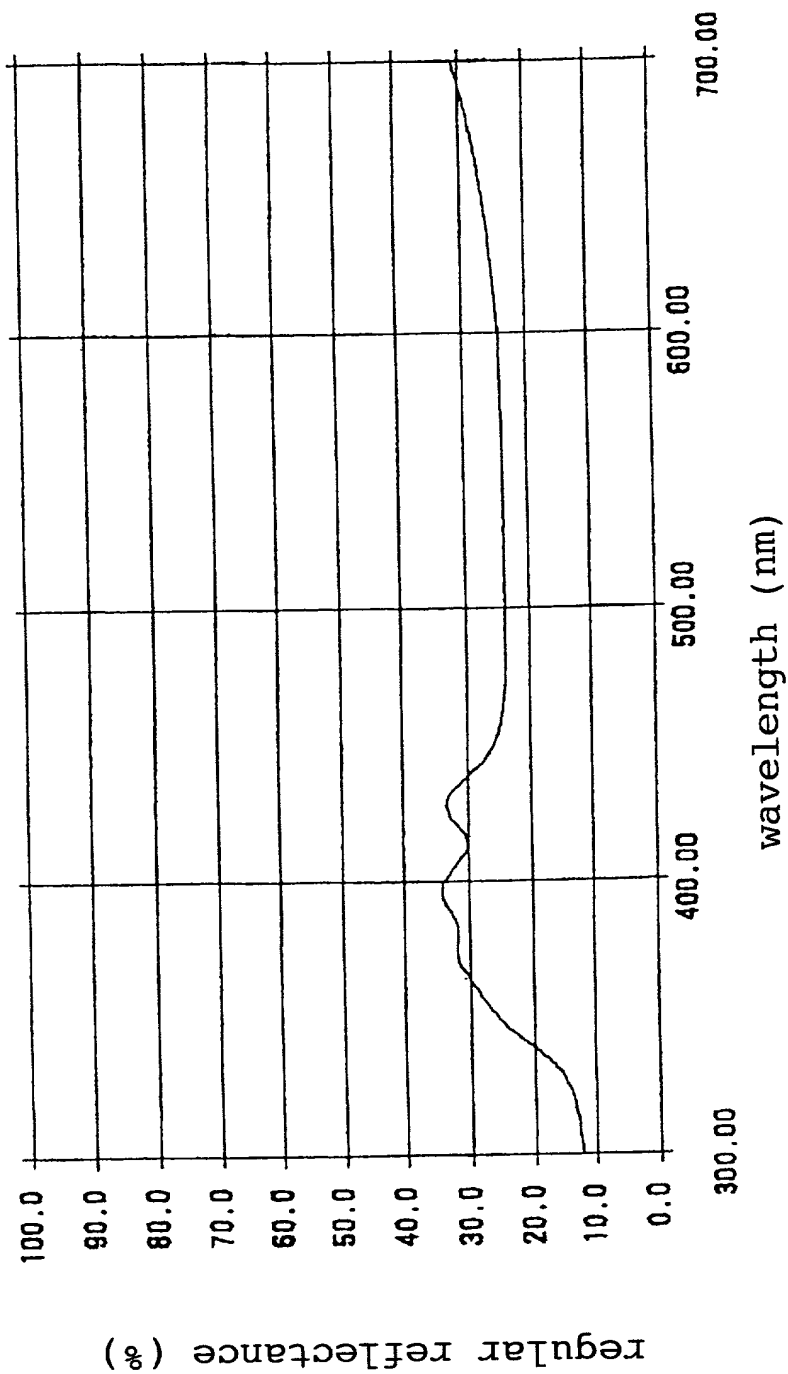

regular reflectance spectrum of PBO fiber
treated with p-phenylenediamine solution

COMBINED DECLARATION AND POWER OF ATTORNEY

As below named inventor, I hereby declare that

This declaration is of the following type:

- ☒ original ☐ design ☐ supplemental
☐ national stage of PCT
☐ divisional ☐ continuation ☐ continuation-in-part

My residence, post office address, and citizenship are as stated below next to my name. I believe I am the original, first, and sole inventor (*if only one name is listed below*) or an original, first, and joint inventor (*if plural names are listed below*) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

POLYBENZAZOLE ARTICLE AND PRODUCTION METHOD THEREOF

the specification of which:

- ☒ is attached hereto.
☐ was filed on _____ as Serial No. _____ and was amended on _____ (*if applicable*).
☐ was filed by Express Mail No. _____ as Serial No. not known yet, and was amended on _____ (*if applicable*).
☐ was described and claimed in PCT International Application No. _____ filed on _____ and as amended under PCT Article 19 on _____ (*if any*).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

COUNTRY	APPLICATION	DATE OF FILING (day,month,year)	PRIORITY CLAIMED UNDER 35 USC 119		
Japan	36314/1999	15/02/1999	✓	YES	NO
				YES	NO
				YES	NO
				YES	NO

I hereby claim the benefit pursuant to Title 35, United States Code, § 119(e) of the following United States provisional application(s):

PRIOR U.S. PROVISIONAL APPLICATIONS CLAIMING THE BENEFIT UNDER 35 USC 119(e)	
APPLICATION NO.	DATE OF FILING

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application.

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 USC 120					
U.S. APPLICATIONS			Status (check one)		
U.S. APPLICATIONS	U.S. FILING DATE	PATENTED	PENDING	ABANDONED	
1. 0 /					
2. 0 /					
3. 0 /					
PCT APPLICATIONS DESIGNATING THE U.S.			Status (check one)		
PCT APPLICATION No.	PCT FILING DATE	U.S. SERIAL NOS. ASSIGNED (if any)	PATENTED	PENDING	ABANDONED
4.					
5.					
6.					

DETAILS OF FOREIGN APPLICATIONS FROM WHICH PRIORITY CLAIMED UNDER 35 USC 119 FOR ABOVE LISTED U.S./PCT APPLICATIONS				
ABOVE APPLN. NO.	COUNTRY	APPLICATION NO.	DATE OF FILING (day, month, yr)	DATE OF ISSUE (day, month, yr)
1.				
2.				
3.				
4.				
5.				
6.				

As a named inventor, I hereby appoint the following attorneys to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Berton Scott Sheppard, Reg. 20922
James B. Muskal, Reg. 22797
Dennis R. Schl  mmer, Reg. 24703
Gordon R. Coons, Reg. 20821
John E. Rosenquist, Reg. 26356
John W. Kozak, Reg. 25117
Charles S. Oslakovic, Reg. 27583
Mark E. Phelps, Reg. 28461
H. Michael Hartmann, Reg. 28423
Bruce M. Gagala, Reg. 28844
Charles H. Mottier, Reg. 30874
John Kilyk, Jr., Reg. 30763
Robert F. Green, Reg. 27555
John B. Conklin, Reg. 30369
James D. Zalewa, Reg. 27848
John M. Belz, Reg. 30359
Brett A. Hesterberg, Reg. 31837
Jeffrey A. Wyand, Reg. 29458

Paul J. Korniczky, Reg. 32849
Pamela J. Ruschau, Reg. 34242
Steven P. Petersen, Reg. 32927
John M. Augustyn, Reg. 33589
Christopher T. Griffith, Reg. 33392
Wesley O. Mueller, Reg. 33976
Jeremy M. Jay, Reg. 33587
Jeffrey B. Burgan, Reg. 35463
Eley O. Thompson, Reg. 36035
Mark Joy, Reg. 35562
Allen E. Hoover, Reg. 37354
David M. Airan, Reg. 38811
Michael H. Tobias, Reg. 32948
Xavier Pillai, Reg. 39799
Y. Kurt Chang, Reg. 41397
Gregory C. Bays, Reg. 40505
Carol Larcher, Reg. 35243

Steven H. Sklar, Reg. 42154
M. Daniel Hefner, Reg. 41826
Thomas A. Belush, Reg. 37090
Kenneth P. Spina, Reg. 43927
Gary R. Jarosik, Reg. 35906
Song Zhu, Reg. 44420
Joseph S. Ostroff, Reg. 39321
Jeffery J. Makeever, Reg. 37390
Salim A. Hasan, Reg. 38175
Richard A. Wulff, Reg. 42238
Jamison E. Lynch, Reg. 41168
Rattan Nath, Reg. 43827
Robert M. Gould, Reg. 43642
David J. Schodin, Reg. 41294
Paul L. Ahern, Reg. 17020
Theodore W. Anderson, Reg. 17035
Noel I. Smith, Reg. 18698

I further direct that correspondence concerning this application be directed to LEYDIG, VOIT & MAYER, LTD., Two Prudential Plaza, Suite 4900, 180 North Stetson, Chicago, Illinois 60601-6780, Telephone (312) 616-5600.

I hereby declare that all statements made herein of my own knowledge are true, that all statements made on information and belief are believed to be true, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first joint inventor: Tetsuo KODAMA

Inventor's signature Tetsuo Kodama

Date 1/21/2000

Country of Citizenship: Japan

Residence: Ohtsu-shi, Shiga, Japan

Post Office Address:

c/o Toyo Boseki Kabushiki Kaisha, Research Institute,
1-1, Katata 2-chome, Ohtsu-shi, Shiga 520-0292 Japan

Full name of second joint inventor: Yusuke SHIMIZU

Inventor's signature Yusuke Shimizu

Date 1/21/2000

Country of Citizenship: Japan

Residence: Ohtsu-shi, Shiga, Japan

Post Office Address:

c/o Toyo Boseki Kabushiki Kaisha, Research Institute,
1-1, Katata 2-chome, Ohtsu-shi, Shiga 520-0292 Japan